

Expo™ Cells Panel




Expo™ Code Panel



Expo™ 45 Panel



Expo™ Galaxy Panel

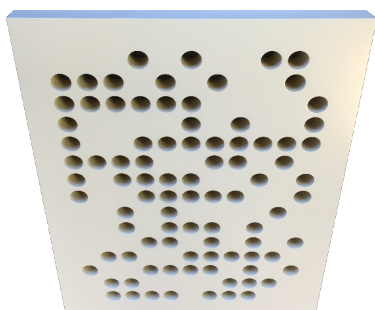

Expo™ Standard Panel

PRODUCT OVERVIEW

The **Expo™ Panels Family** is the ultimate synergy between acoustical technology and architectural panel design using an optimal binary pattern of perforations. They are available in a high recycled content, ULEF, Class A fire-rated ULEF and FSC®-certified wood panel MDF core with an optional black fleece backer. The **Expo™ Panels Family** achieves an excellent balance of sound absorption across the NRC frequency bands while preserving the space's ambiance with high-frequency diffusion.

SIZING

- Standard Panel: 4' W x 8' L x 3/4" T
- Maximum Panel: up to 5' W x 12' L may be available (Custom panel widths and lengths are available)
- Standard Panels: Cells, Code, 45, Galaxy & Standard (Custom profiles available upon request)
- Planks with T & G long edges can be provided in lieu of panels. Plank widths to be finalized during the submittals process.
- Each panel weighs approx. 2.00 lbs/ft²

CORE FIRE RATING

Class A (per ASTM E-84)

FINISH

The **Expo™ Panels Family** is available in natural and engineered wood veneers and laminates with clear lacquer or factory color-matching of wood finishes and paint colors. Standard species include Alder, Anigre, Ash, Birch, Cherry, Mahogany, Maple, Poplar, Red Oak, Walnut and White Oak. Custom species may be available on request.

Black MDF core is available for larger perforation options.

INSTALLATION

Mounting options for the **Expo™ Panels Family** include wall systems (Z-clips, direct screw attached) either surface-mounted or with a variety of cavity depths starting at 1-3/4" total system depth, and ceilings systems with options (Torsion Springs for downward access, RPG C-clips for lift and shift access, direct screw attached) for standard 15/16" HD T-grid supplied by others.

Note: See individual Expo™ data sheets for additional information.